Moniteur

High Temperature VPTs

Sentinel (Explosion-Proof)

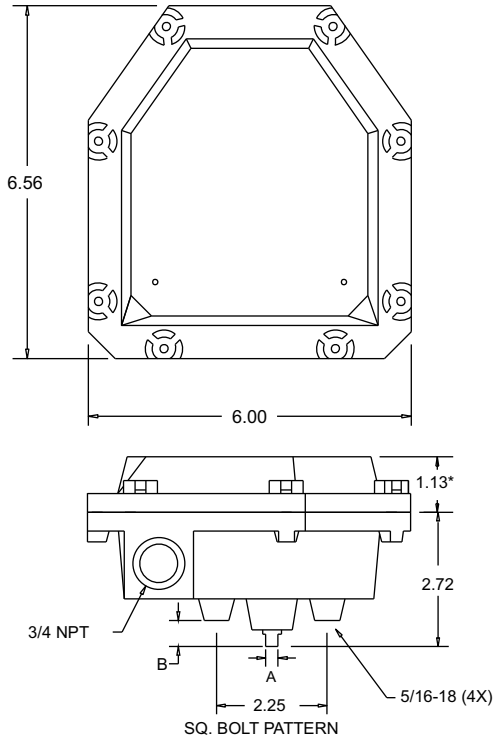

Dimensions

	NAMUR	STD.
A	0.156	0.249
B	0.62**	0.53

** - LONG NAMUR = 1.28"

Watchman (General Purpose)

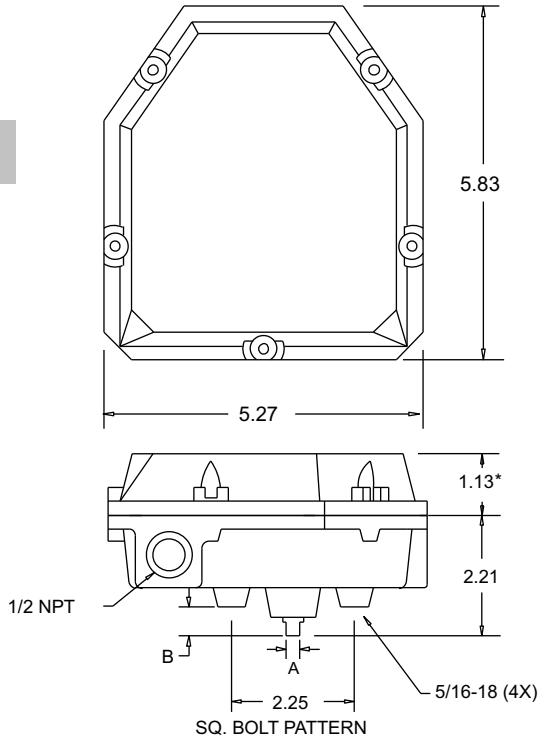

Specifications - 212° Rating - (switch 1)

Nema Rating	(Watchman)	4, 4x
	(Sentinel)	4, 4x, 7, 9
Housing / Cover		Aluminum
Seals		BUNA-N
Fasteners		Stainless Steel
Terminal Points		8
Operating Temp.		-40° F to 212° F

Specifications - 220° Rating - (switch 2 or T)

Nema Rating	(Watchman)	4, 4x
	(Sentinel)	4, 4x, 7, 9
Housing / Cover		Aluminum
Seals		Viton
Fasteners		Stainless Steel
Terminal Points		8 screw-down
Operating Temp.		-40° F to 250° F

Intelligent Part Numbering System

F				-				-	HT
Series	*Cover*	*Moniteur*	*Bearing*		*Shaft*	*Switch / Quantity*		*Conduit*	

Description	Code
Series:	
Sentinel (Ex-Proof)	A
Watchman (Nema 4)	F
Cover	
Flat Cover (No Moniteur)	F
Moniteur	
No Indicator	N
Bearing	
Bronze	B

Description	Code
Shaft	
Standard 303 SS	1
Standard 316 SS	3
NAMUR 303 SS	5
NAMUR 316 SS	7
Long NAMUR 303 SS	E
Switch Package	
(2) Cherry 15A SPDT Mechanical	1
(2) Tungsten TTL 3A/125 VAC SPDT Non-Contact	2
(2) Rhodium TTL 1A / 24 VDC SPDT Non-Contact	T

Description	Code
Conduit (Watchman)	
(2) ½" F NPT	0
(3) ½" F NPT	6
Conduit (Sentinel)	
(2) ¾" F NPT	0
(3) ¾" F NPT	5
Temperature Rating	
High Temperature	-HT

MONITEUR DEVICES INCORPORATED
36 Commerce Road, Cedar Grove, NJ 07009 Tel. (973) 857-1600 Fax (973) 857-7289
www.moniteurdevices.com

Form HT-0409