


Dimensions

Top View

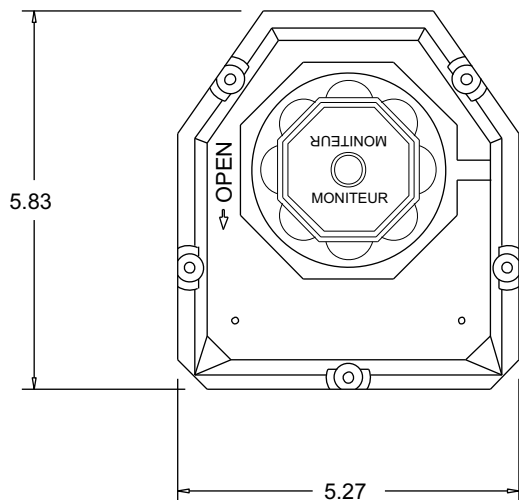


NAMUR STD.

	NAMUR	STD.
A	0.156	0.249
B	0.62**	0.53



Side View

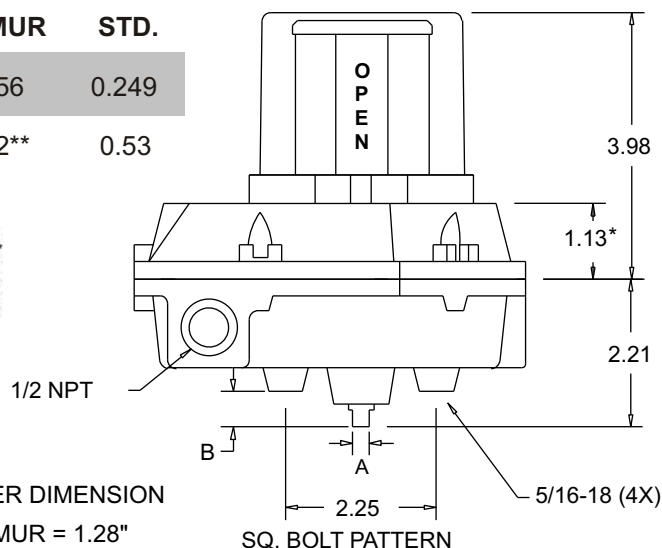

* - FLAT COVER DIMENSION

** - LONG NAMUR = 1.28"


General Specifications

Nema Rating	4, 4x
Housing / Cover	Aluminum
Indicator Cover	Ektar
Seals	BUNA-N
Fasteners	Stainless Steel
Terminal Points	14
Weight	4.25 lbs.
Operating Temp.	-40° F to 175° F
Agency Approvals	CSA

How To Specify

Valve position transmitter shall be Moniteur model FMYB-1140 / FMYB-5140 / FMYB-E140. Enclosure shall be aluminum with a polyurethane coating and rated Nema 4, 4x. Visual indicator shall have 100% display change, 360° visibility and full set point adjustability. Indicator cover shall be free of decals or paint and sealed with an O-ring. Enclosure shall have captive cover bolts. Enclosure shaft shall be attached to a Stainless Steel housing bearing with an internal stainless steel locking ring, environmentally protected with an O-ring. The switch type shall be Cherry Mechanical SPDT rated 15A @ 125VAC - 2.5A @ 24 VDC. A total of two (4) switches shall be included along with eight terminal points. All switches and terminals must be enclosed and marked for simple identification.

Wiring Diagram

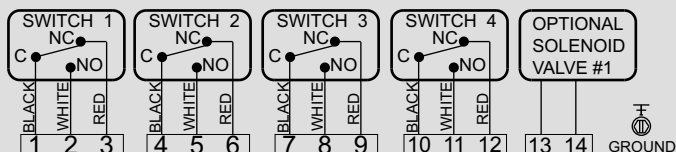

Agency Approvals
CSA General Purpose

Part Number Description

F	M	Y	B	-	5	1	4	0
Series	Cover	Moniteur	Bearing		Shaft	Switch	Quantity	Conduit

Description	Code	Description	Code	Description	Code
Series: Watchman	F	Shaft		Switch Quantity	4
Cover		Standard 303 SS, 1/4" flats	1	Conduit	
With Moniteur	M	Low Profile NAMUR 303 SS	5	(2) 1/2" F NPT	0
Moniteur		Standard NAMUR 303 SS	E		
Black / Yellow	Y	Switch Type			
Bearing		Cherry Mechanical SPDT			
Sintered Bronze	B	rated 15A/250VAC -			
		2.5A/24VDC	1		