


Dimensions


Top View

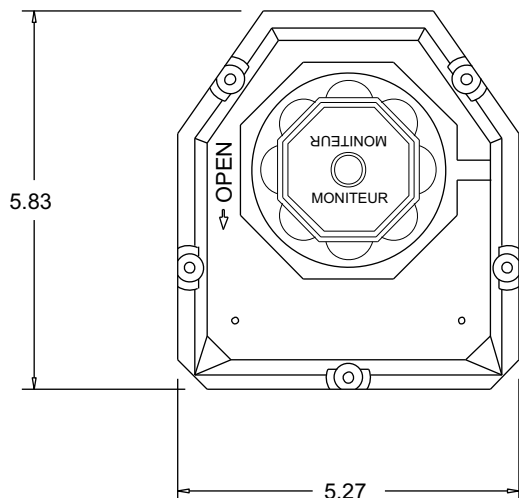

NAMUR STD.

	NAMUR	STD.
A	0.156	0.249
B	0.62**	0.53

Side View

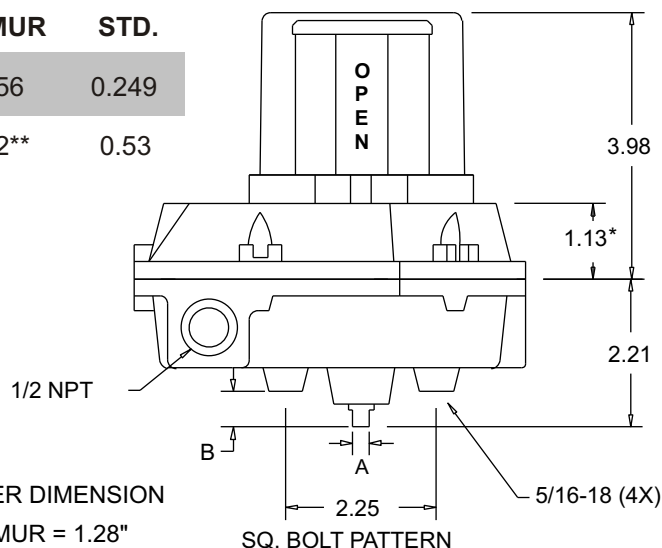


* - FLAT COVER DIMENSION

** - LONG NAMUR = 1.28"

General Specifications

Nema Rating	4, 4x, 7, 9
Housing / Cover	Aluminum
Indicator Cover	Ektar
Seals	BUNA-N
Fasteners	Stainless Steel
Terminal Points	8
Weight	4.25 lbs.
Operating Temp.	-40° F to 175° F

Wiring Diagram

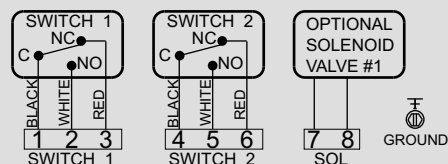

How To Specify

Valve position transmitter shall be Moniteur model FMYB-1220 / FMYB-5220 / FMYB-E220. Enclosure shall be aluminum with a polyurethane coating and rated Nema 4, 4x. Visual indicator shall have 100% display change, 360° visibility and full set point adjustability. Indicator cover shall be free of decals or paint and sealed with an O-ring. Enclosure shall have captive cover bolts. Enclosure shaft shall be attached to a Stainless Steel housing bearing with an internal stainless steel locking ring, environmentally protected with an O-ring. The switch type shall be Tungsten TTL Proximity SPDT rated 3A/125VAC - 2A/24VDC. A total of two (2) switches shall be included along with eight terminal points. All switches and terminals must be enclosed and marked for simple identification.

Part Number Description

F	M	Y	B	-	5	2	2	0
Series	Cover	Moniteur	Bearing		Shaft	Switch	Quantity	Conduit

Description	Code	Description	Code	Description	Code
Series: Watchman	F	Shaft		Switch Quantity	2
Cover		Standard 303 SS - 1/4" Flats	1	Conduit	
With Moniteur	M	Low Profile NAMUR 303 SS	5	(2) 1/2" F NPT	0
Moniteur		Standard NAMUR 303 SS	E		
Black / Yellow	Y	Switch Type			
Bearing		Tungsten TTL SPDT			
Sintered Bronze	B	rated 3A/125VAC -			
		2A/24VDC	2		